

## 81556240WW-US

455

LED Upgrade Kit

LED | 240 W 3000 K

LED



DALI



IK08

CE

5Y

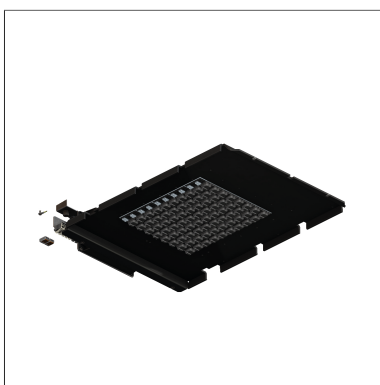

LED 3000 K 28200lm	
$\eta_{LOR}$	= 100%
UGR	= 31.7
$E[x]$	100lx 500lx
$a[m^2]$	n=1 n=3
100	
HOF16289	

- LED Upgrade Kit 455
- to plane projector 155
- with LED 34000 lm
- colour temperature: 3000 K
- colour rendering index: CRI >80
- SDCM < 3
- net luminous flux: 28200 lm
- total load: 240 W
- luminous efficacy: 117,5 lm/W
- asymmetrical light distribution, wide beam
- with built in LED power unit, electronic (DALI), 220-240 V, 0/50/60 Hz
- overvoltage protection 10KV
- optional DC voltage suitable (AC/DC) - 15% power for operation in emergency lighting systems
- further dimming functions on request
- power supply: connecting terminal 5x2,5 mm<sup>2</sup>
- loop-in loop-out capable, for cable diameter 8-12mm
- Glass replacement recommended (article number glass: 8155000100)
- length: 703 mm, width: 420 mm, height: 150 mm
- windage area: 0,10 m<sup>2</sup>
- weight: 3,9 kg
- protection class I
- 5 years warranty
- designed and manufactured in Germany
- maximum ambient temperature: 22 ° C
- impact resistance class: IK08
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- 81556240WW-US

- - -

81556240WW-US  
accessory

Required accessories

description accessory general	dimensions in mm	item number	pic.-No.
Replacement glass with hinge, seal included for upgrade kit 455		8155000100	01

