


## 81556160NW-US

455  
LED Upgrade Kit  
LED | 160 W 4000 K

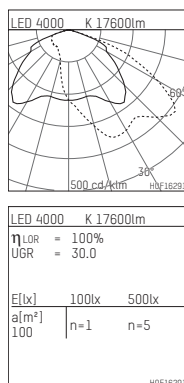

- LED Upgrade Kit 455
- to plane projector 155
- with LED 21230 lm
- colour temperature: 4000 K
- colour rendering index: CRI >80
- SDCM < 3
- net luminous flux: 17600 lm
- total load: 160 W
- luminous efficacy: 110,0 lm/W
- asymmetrical light distribution, wide beam
- with built in LED power unit, electronic (DALI), 220-240 V, 0/50/60 Hz
- overvoltage protection 10KV
- optional DC voltage suitable (AC/DC) - 15% power for operation in emergency lighting systems
- further dimming functions on request
- power supply: connecting terminal 5x2,5 mm<sup>2</sup>
- loop-in loop-out capable, for cable diameter 8-12mm
- Glass replacement recommended (article number glass: 8155000100)
- length: 703 mm, width: 420 mm, height: 150 mm
- windage area: 0,10 m<sup>2</sup>
- weight: 3,7 kg
- protection class I
- 5 years warranty
- designed and manufactured in Germany
- maximum ambient temperature: 42 ° C
- impact resistance class: IK08
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- 81556160NW-US

- - -

81556160NW-US  
**accessory**

## Required accessories

description accessory general	dimensions in mm	item number	pic.-No.
Replacement glass with hinge, seal included for upgrade kit 455		8155000100	01

